


Bolted Mechanical fittings

Standard series

Coupling



Plain End to Plain End

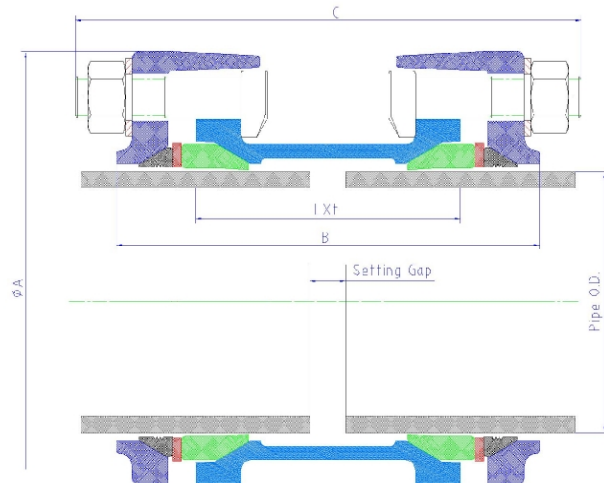

Main Dimensions

Unit: mm

Size	Pipe O.D.		Coupling Overall			Body		Setting Gap		Bolts	Weight
	SGP-PD *	HIVP * *	A	B	C	L	t	Min	Max	n- M x L	Kg
50L	64.5	60	142	150	186	110	4	7	52	3-M14x60	3.9
65	80.3	76	168	145	190	90	4.5	8	22	3-M18x76	4.4
80	93.1	89	182	172	204	110	5	10	32	3-M18x76	5.4
80L	93.1	89	182	222	254	160	5	10	82	3-M18x76	6.6
100	118.3	114	219	196	206	118	6	12	30	3-M18x76	8.5
100L	118.3	114	219	258	268	180	6	12	92	3-M18x76	10.3

* JWWA K 132: Polyethylene powder-coated steel pipe for water supply.

* * JIS K 6742: Unplasticized poly (vinyl chloride) (PVC-U) pipes for water supply or other Imperial pipes including PVC pipe, PE Pipe, ABS pipe and Steel pipe.

The Coupling is designed without pipe stopper in the middle of the body allowing pipe line repair usage. The whole coupling can be slid completely over the end of the pipe to enable a repair pipe piece inserted.



Qingdao Rockpower Machinery Co., Ltd.

1506, Sino-Commerce Building, 100, Middle Hongkong Road, Qingdao, China
www.rockpower.cn

Tel.: (0532) 8592-1910 8592-1920 Fax.: (0532) 8592-1252
 e-mail: rockson@rockpower.cn