


Junior Mechanical fittings

Standard series

Reducing Coupling

Plain End to Plain End

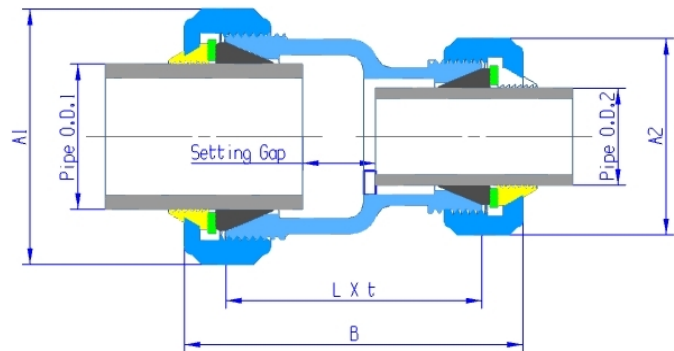

Main Dimensions

Unit: mm

Size	Pipe O.D.1		Pipe O.D.2		Fitting Overall			Body		Setting Gap		Weight
	SGP-PD *	HIVP * *	SGP-PD *	HIVP * *	A1	A2	B	L	t	Min	Max	Kg
20X15	30.2	26.0	24.7	22.0	55	49	73	60	3	6	12	0.4
25X15	37.0	32.0	24.7	22.0	66	49	78	65	4	7	17	0.4
25X20	37.0	32.0	30.2	26.0	66	55	79	65	4	7	12	0.5
32X15	45.7	42.0	24.7	22.0	73	49	84	70	4	8	23	0.5
32X20	45.7	42.0	30.2	26.0	73	55	84	70	4	8	19	0.5
32X25	45.7	42.0	37.0	32.0	73	66	85	70	4	8	19	0.5
40X15	52.6	48.0	24.7	22.0	80	49	89	75	4	8	29	0.7
40X20	52.6	48.0	30.2	26.0	80	55	90	75	4	8	24	0.7
40X25	52.6	48.0	37.0	32.0	80	66	90	75	4	8	24	0.8
40X32	52.6	48.0	45.7	42.0	80	73	91	75	4	8	26	0.8
50X15	64.5	60.0	24.7	22.0	96	49	95	80	5	10	34	1.0
50X20	64.5	60.0	30.2	26.0	96	55	95	80	5	10	29	1.1
50X25	64.5	60.0	37.0	32.0	96	66	96	80	5	10	29	1.1
50X32	64.5	60.0	45.7	42.0	96	73	96	80	5	10	31	1.2
50X40	64.5	60.0	52.6	48.0	96	80	97	80	5	10	31	1.2

* JWWA K 132: Polyethylene powder-coated steel pipe for water supply.

* * JIS K 6742: Unplasticized poly (vinyl chloride) (PVC-U) pipes for water supply or other Imperial pipes including PVC pipe, PE Pipe, ABS pipe and Steel pipe.



Qingdao Rockpower Machinery Co., Ltd.

1506, Sino-Commerce Building, 100, Middle Hongkong Road, Qingdao, China
www.rockpower.cn

Tel.: (0532) 8592-1910 8592-1920 Fax.: (0532) 8592-1252
 e-mail: rockson@rockpower.cn